


ÖUT @UÙ

# Dominos polypropylène

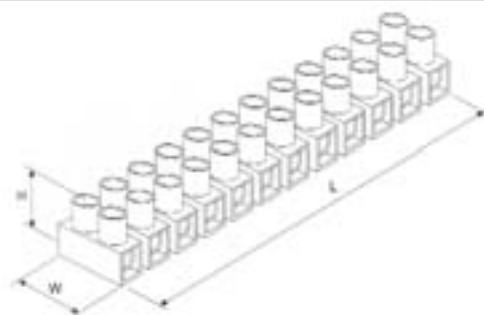


Contacts: Laiton  
Corps: polypropylène (PP)  
Temp.: 80° C  
Vis: Acier galva  
Normes: CE (BS EN 60998)

Couleur:  Blanc,  noir  
Caractéristiques: Semi-rigides.  
**ECONOMIQUES**. Retardateur  
de flamme, vis imperdables

Ref. <input type="checkbox"/> blanc	Ref. <input checked="" type="checkbox"/> noir	Section de câble m <sup>2</sup> n	Ampérage	Voltage	Nbre de pôles	Dimensions mm.			
						L	W	H	
<b>CPP-3A</b>	<b>CPP-3A-1</b>	4	3~24 A	380 V	12	93	17	14	10/1000
<b>CPP-5A</b>	<b>CPP-5A-1</b>	6	5~32 A	380 V	12	114	19	16	10/1000
<b>CPP-10A</b>	<b>CPP-10A-1</b>	10	10~57 A	400 V	12	125	21	17	10/500
<b>CPP-15A</b>	<b>CPP-15A-1</b>	12	15~61 A	400 V	12	138	23	19	10/500
<b>CPP-30A</b>	<b>CPP-30A-1</b>	16	30~76 A	400 V	12	165	26	20	10/300
<b>CPP-60A</b>	<b>CPP-60A-1</b>	25	60~101 A	400 V	12	186	30	26	5/100

# Dominos polyamide

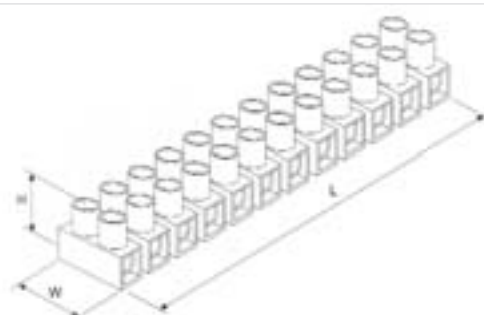

Contacts: Laiton  
Corps: polyamide (PA66)  
Temp.: 105° C  
Vis: Acier galva  
Normes: CE (BS EN 60998)

Couleur:  Blanc,  noir  
Caractéristiques: Semi-rigides.  
**ECONOMIQUES**. Retardateur  
de flamme, vis imperdables,  
haute température.

Ref. <input type="checkbox"/> blanc	Ref. <input checked="" type="checkbox"/> noir	Section de câble m <sup>2</sup> n	Ampérage	Voltage	Nbre de pôles	Dimensions mm.			
						L	W	H	
<b>CPA-3A</b>	<b>CPA-3A-1</b>	4	3~24 A	380 V	12	93	17	14	10/1000
<b>CPA-5A</b>	<b>CPA-5A-1</b>	6	5~32 A	380 V	12	114	19	16	10/1000
<b>CPA-10A</b>	<b>CPA-10A-1</b>	10	10~57 A	400 V	12	125	21	17	10/500
<b>CPA-15A</b>	<b>CPA-15A-1</b>	12	15~61 A	400 V	12	138	23	19	10/500
<b>CPA-30A</b>	<b>CPA-30A-1</b>	16	30~76 A	400 V	12	165	26	20	10/300
<b>CPA-60A</b>	<b>CPA-60A-1</b>	25	60~101 A	400 V	12	186	30	26	5/100